






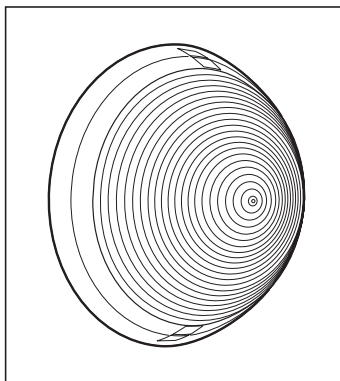


sarlam

SUPER 400 à détection HF



			
 max	53 W		
 max	15 W		
 max	18 W		




< 15 mm




> 15 mm → OK


1

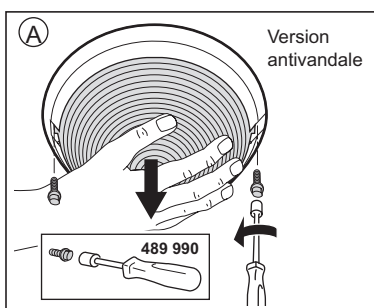



(B)






(C)




2




3

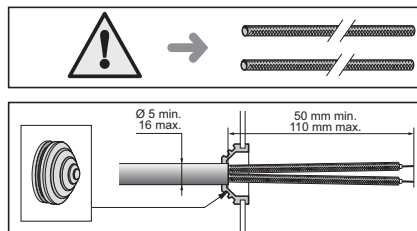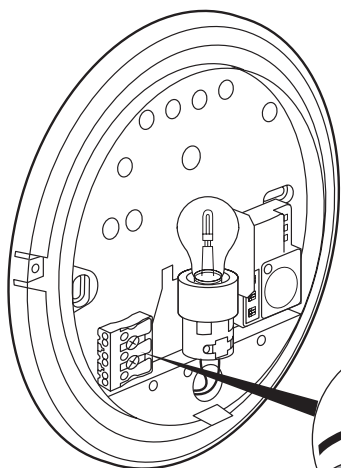



4

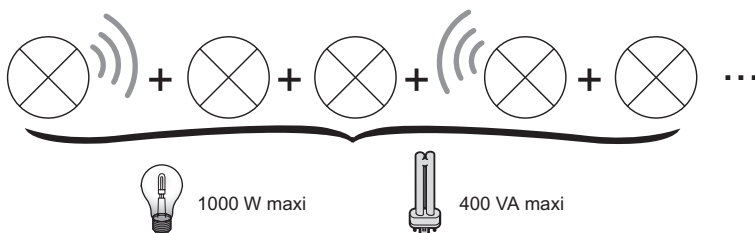



Raccordement de luminaires esclaves

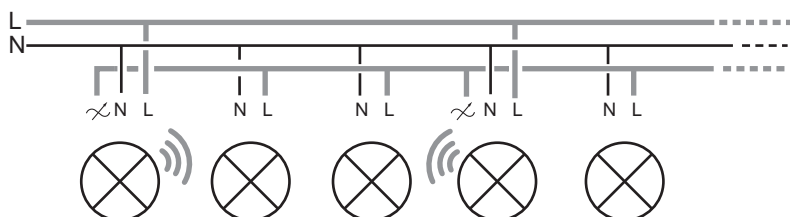



5 Sensibilité (portée de détection)



	1	2	3	
I	●	●	●	100 %
II	○	●	●	75 %
III	●	○	●	50 %
IV	●	●	○	30 %
V	○	○	○	10 %

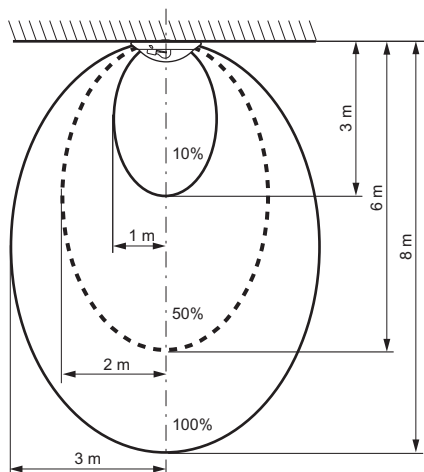
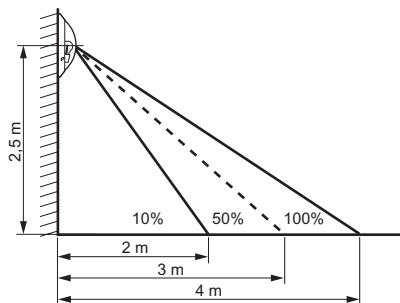


6 Seuil de luminosité



	1	2	3	
I	●	●	●	2 lux
II	○	●	●	5 lux
III	●	○	●	20 lux
IV	○	●	○	30 lux
V	○	○	○	Désactivé


7 Temporisation




	1	2	3	
I	●	●	●	5 s
II	○	●	●	30 s
III	●	○	●	3 min.
IV	○	○	●	5 min.
V	●	●	○	15 min.
VI	○	○	○	25 min.

8


A





B



C

Version
antivandale

D



9

