


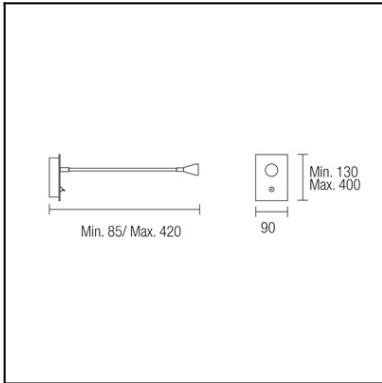

La finition de la photographie peut ne pas coïncider avec celle de la référence. Pour identifier la finition réelle, voir la description de cette dernière.


CARACTÉRISTIQUES TECHNIQUES

| | |
|---|--|
| Type: | Applique |
| Indice de protection IP: | IP20 |
| Source lumineuse 1: | 1 x LED Cree 1W Blanc chaud - 3 000 K 107 lm ^(N) CRI 80 |
| Angle des lentilles / Réflecteur: | 30° |
| Tension / Fréquence: | 100-240V/50-60Hz |
| Garantie (Années): | 2 |
| Possibilité d'extension de garantie (Années): | 5 |
| Unités par caisse: | 6 |
| Poids net (kg): | 0.49 |
| EAN: | 8435111066317 |


MATIÈRES / FINITIONS


Matière structure: Acier
Aluminium anodisé

Finition structure: Chrome


ÉQUIPEMENT

Équipement électronique multitenion compris (220-240V / 50-60 Hz)

Led 1W



Download photometric file .ldt / .ies

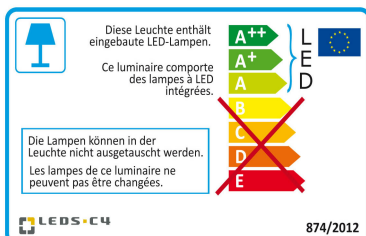

Cliquez sur l'image pour télécharger l'étiquette-énergie


Lm^(N): Flux nominal du luminaire dans des conditions réelles de fonctionnement. Son flux réel dépend des conditions environnementales ainsi que de l'efficacité de la lentille et/ou du diffuseur.

LEDS-C4 se réserve le droit d'apporter les modifications techniques opportunes en vue d'améliorer les prestations du produit. Veuillez consulter l'équipe commerciale pour tout renseignement.

| Luminaire | | Measur. | | Lamp | |
|----------------------------|------------------------------|-----------------------------|------------------------------|--------------------|--------------------|
| Code | 05-2837-21-21 | Code | 05-2837-21-21 | Code | LAMP 05-2837-21-21 |
| Name | Aplique BOOK 1x1W led prisma | Name | Aplique BOOK 1x1W led prisma | Number | 1 |
| Line | Eulumdat | Date | 26-07-2010 | Position | |
| Efficiency | 100.00% | Coordinate system | CG | Total Flux | 57.42 lm |
| Maximum value | 168.77 cd | Position | C=0.00 G=0.00 | Double Symmetrical | |
| Round Luminaire | Diam. | 32 mm | Height | 40 mm | |
| Round Luminous Area | Diam. | 21 mm | Height | 1 mm | |
| Horizontal Luminous Area | 0.000346 m2 | Emitting area on Plane 180° | 0.000021 m2 | | |
| Emitting area on Plane 0° | 0.000021 m2 | Emitting area on Plane 270° | 0.000021 m2 | | |
| Emitting area on Plane 90° | 0.000021 m2 | Glare area at 76° | 0.000104 m2 | | |
| Symmetry Type | Double Symmetrical | Maximum Gamma Angle | 90 | | |
| Measurement Distance | 0.00 | Measurement Flux | 57.42 lm | | |
| Operator | Asselum | Source voltage | | | |
| Temperature | 25.00 °C | Source current | | | |
| Humidity | 60.00 % | Photocell | | | |
| Notes | | | | | |

| Luminaire Lamps | | | | | | |
|-----------------|--------------------|-----------------------------|-----------|----------|------|------|
| Line | Code | Name | Flux [lm] | Pow. [W] | Q.ty | |
| Eulumdat | LAMP 05-2837-21-21 | LAMP 05-2837-21-21 - 1.00 W | 57.42 | 1.00 | 1 | |
| C.I.E. | 90 98 100 100 100 | D DIN 5040 | | | | A60 |
| F UTE | 1.00 A | B NBN | | | | BZ 1 |


Diam=32mm






C Halfplanes



180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

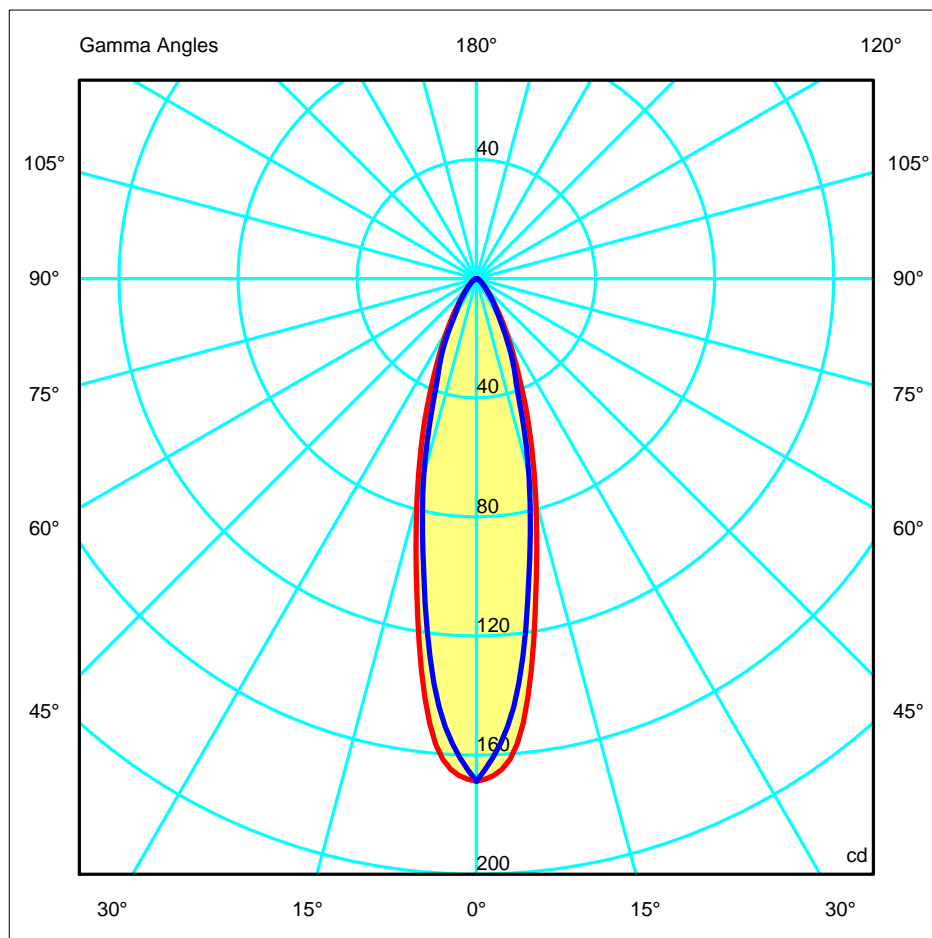


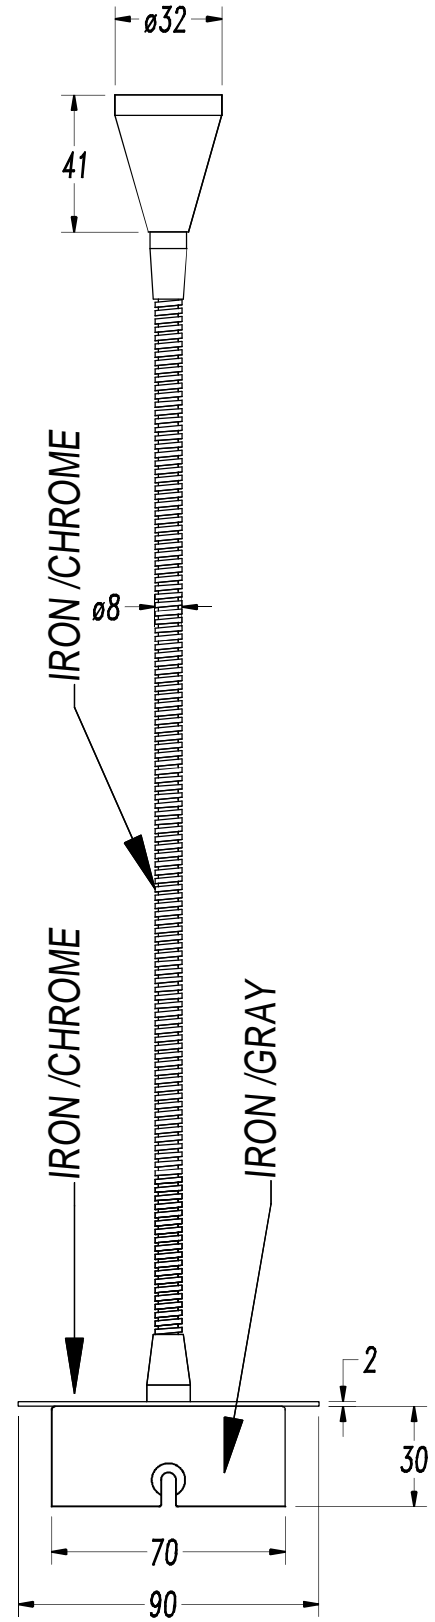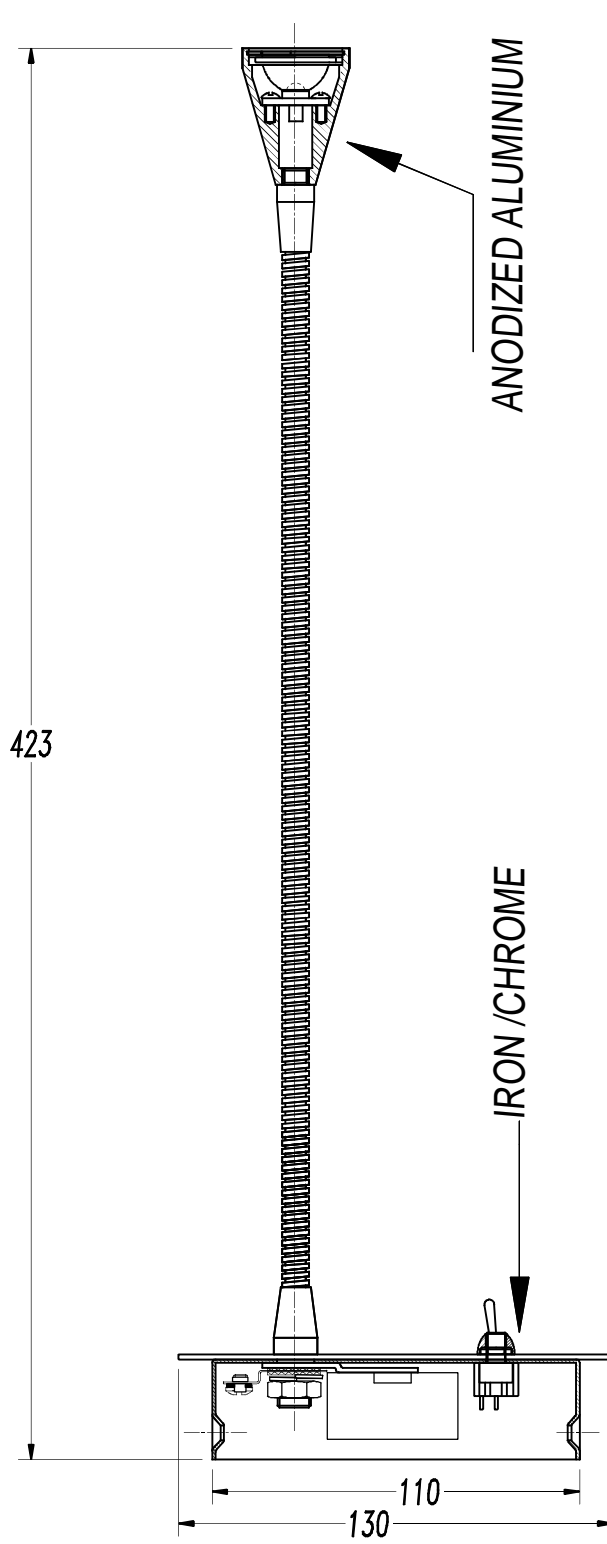




1

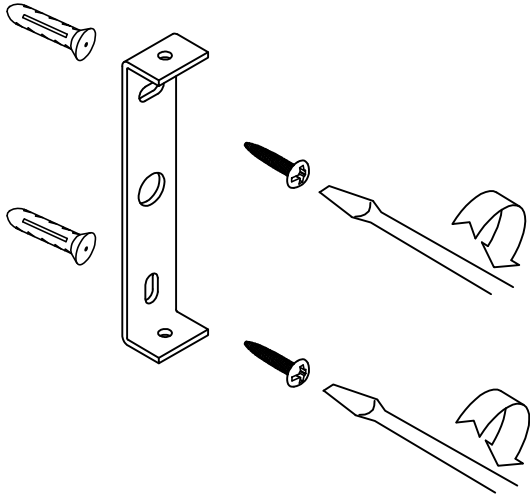

2

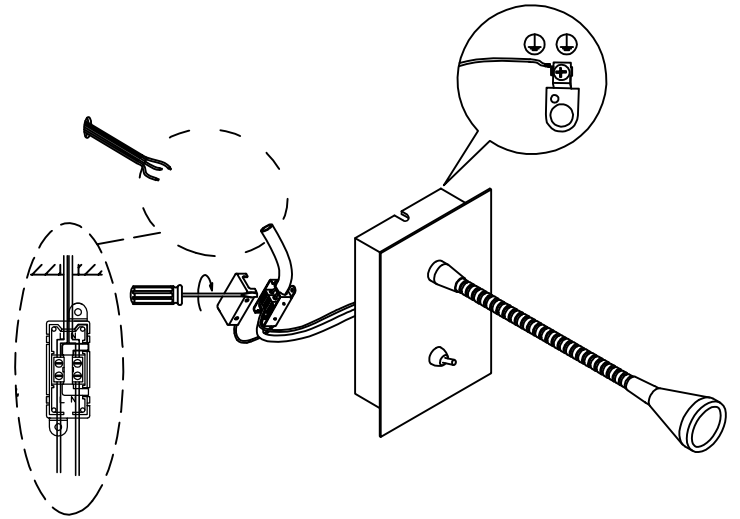

3

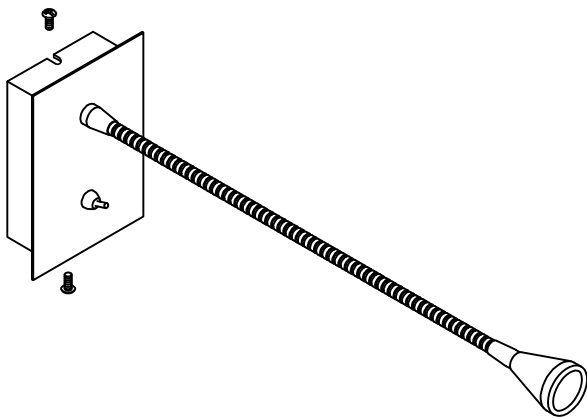

4

