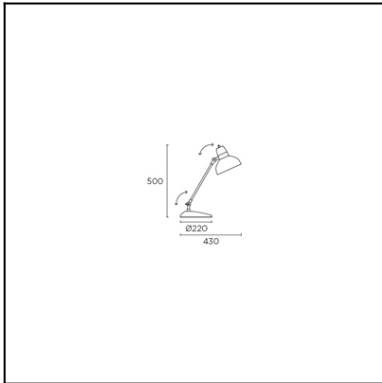
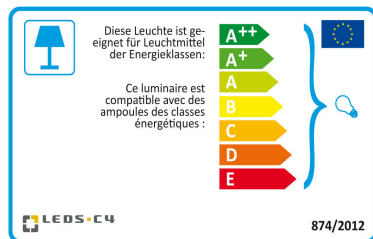




La finition de la photographie peut ne pas coïncider avec celle de la référence. Pour identifier la finition réelle, voir la description de cette dernière.



Download photometric file .ldt /.ies



Cliquez sur l'image pour télécharger l'étiquette-énergie

### CARACTÉRISTIQUES TECHNIQUES

|                          |  |
|--------------------------|--|
| Type:                    | Lampe de table   |
| Orientable:              | Rotation de $\pm 180^\circ$ sur le plan vertical.<br>Rotation de $\pm 90^\circ$ sur le plan horizontal.    |
| Indice de protection IP: | IP20   |
| Source lumineuse 1:      | 1 x E27<br>max.60W<br>Longueur maximale de la lampe : 130.00 mm<br>Diamètre maximum de la lampe : 70.00 mm |
| Tension / Fréquence:     | 220-240V/50-60Hz   |
| Garantie (Années):       | 2  |
| Unités par caisse:       | 1  |
| Poids net (kg):          | 3.745  |
| EAN:                     | 8435381403034  |
| Stability:               | >15°   |




### MATIÈRES / FINITIONS

|                     |                 |
|---------------------|-----------------|
| Matière structure:  | Acier           |
| Finition structure: | Blanc<br>Chrome |

|                            |              |                             |                 |              |              |      |
|----------------------------|--------------|-----------------------------|-----------------|--------------|--------------|------|
| <b>Luminaire</b>           |              | <b>Measur.</b>              |                 | <b>Lamp</b>  |              |      |
| Code                       | 10-1530      | Code                        | 10-1530         | Code         | INCANDESCENT |      |
| Name                       | DESK LAMP    | Name                        | DESK LAMP       | Number       | 1            |      |
| Line                       | Eulumdat     | Date                        | 16-11-2013      | Position     |              |      |
| Efficiency                 | 64.77%       | Coordinate system           | CG              | Total Flux   | 710.00 lm    |      |
| Maximum value              | 170.12 cd    | Position                    | C=270.00 G=2.00 | Asymmetrical |              |      |
| Rectangular Luminaire      | Length       | 180 mm                      | Width           | 180 mm       | Height       | 1 mm |
| Rectangular Luminous Area  | Length       | 180 mm                      | Width           | 180 mm       | Height       | 0 mm |
| Horizontal Luminous Area   | 0.032400 m2  | Emitting area on Plane 180° |                 | 0.000000 m2  |              |      |
| Emitting area on Plane 0°  | 0.000000 m2  | Emitting area on Plane 270° |                 | 0.000000 m2  |              |      |
| Emitting area on Plane 90° | 0.000000 m2  | Glare area at 76°           |                 | 0.007838 m2  |              |      |
| Symmetry Type              | Asymmetrical | Maximum Gamma Angle         |                 | 90           |              |      |
| Measurement Distance       | 0.00         | Measurement Flux            |                 | 710.00 lm    |              |      |
| Operator                   |              | Source voltage              |                 |              |              |      |
| Temperature                | 25.00 °C     | Source current              |                 |              |              |      |
| Humidity                   | 60.00 %      | Photocell                   |                 |              |              |      |
| Notes                      |              |                             |                 |              |              |      |

| Luminaire Lamps |                 |                        |           |          |      |  |
|-----------------|-----------------|------------------------|-----------|----------|------|--|
| Line            | Code            | Name                   | Flux [lm] | Pow. [W] | Q.ty |  |
| Eulumdat        | INCANDESCENT    | INCANDESCENT - 57.40 W | 710.00    | 57.40    | 1    |  |
| C.I.E.          | 48 83 97 100 65 | D DIN 5040             |           | A30      |      |  |
| F UTE           | 0.65 E          | B NBN                  |           | BZ 4     |      |  |

180mm x 180mm



**C Halfplanes**


180.0 — 0.0













270.0 — 90.0

ULOR 0.00 %

DLOR 64.77 %

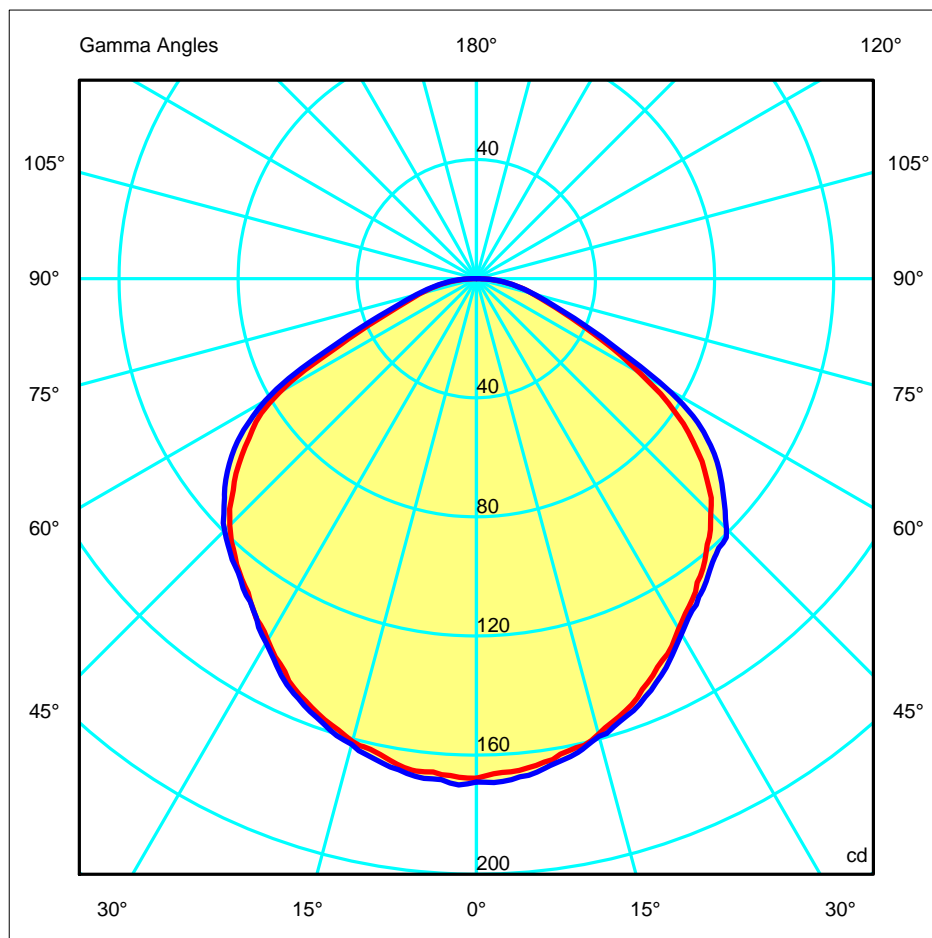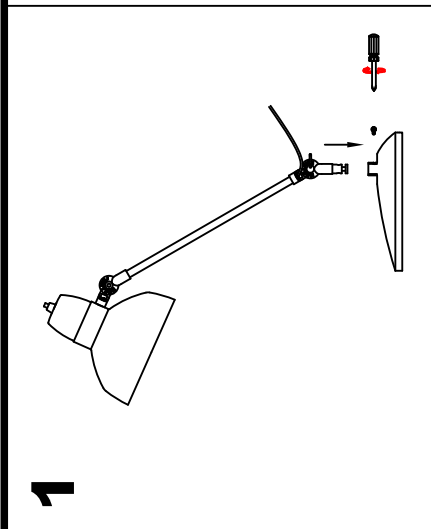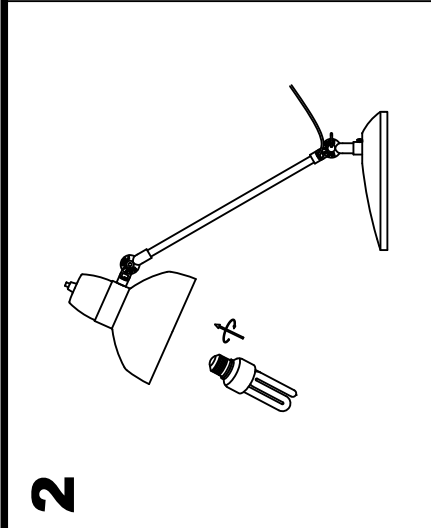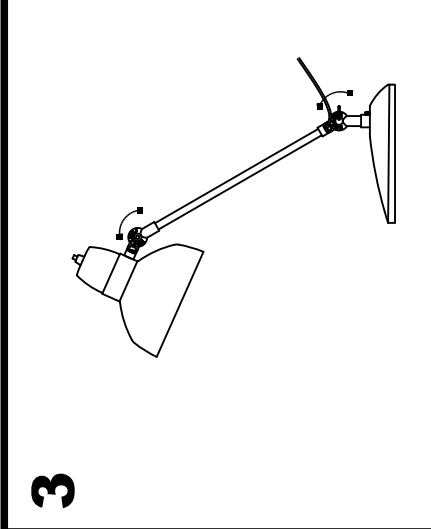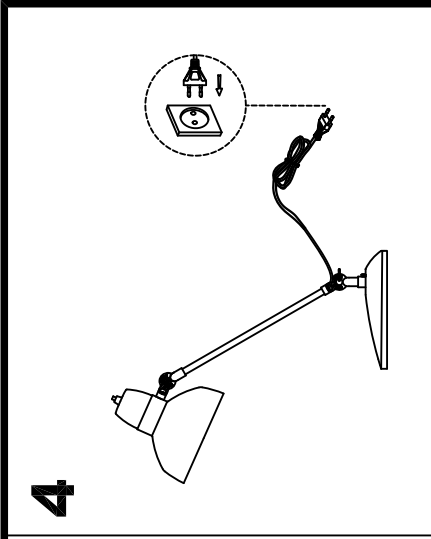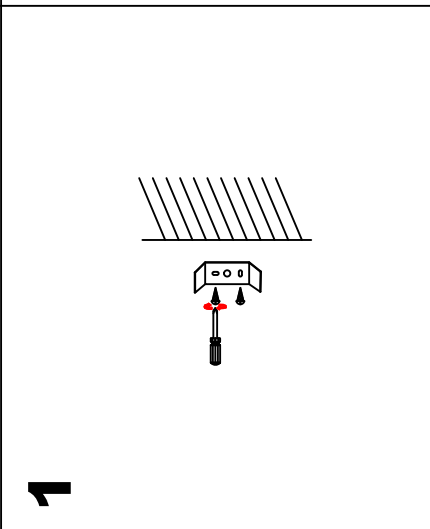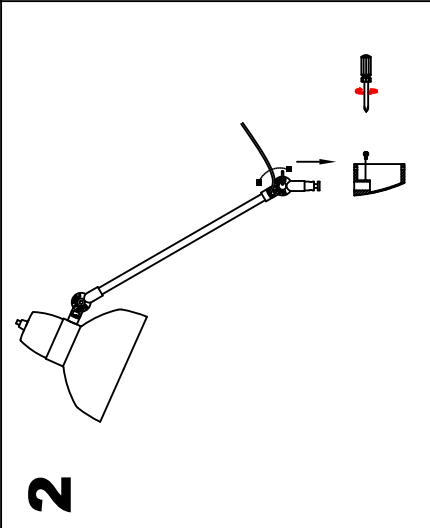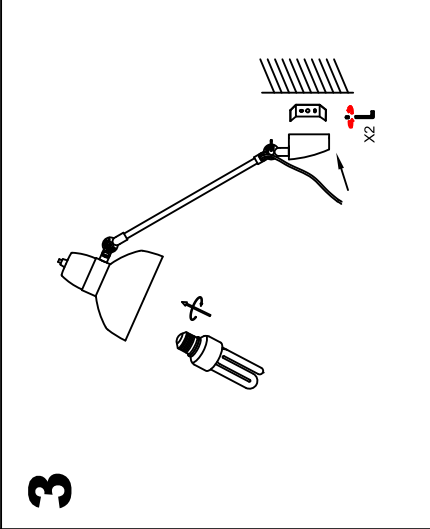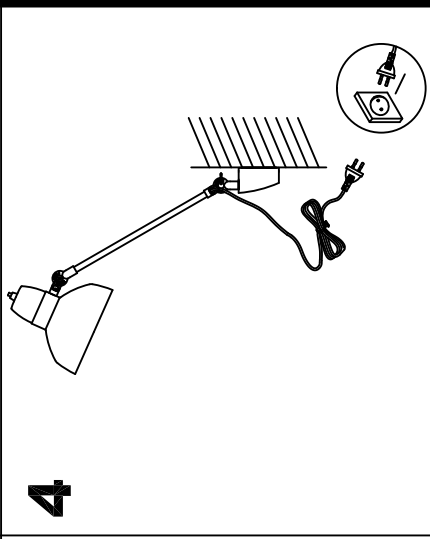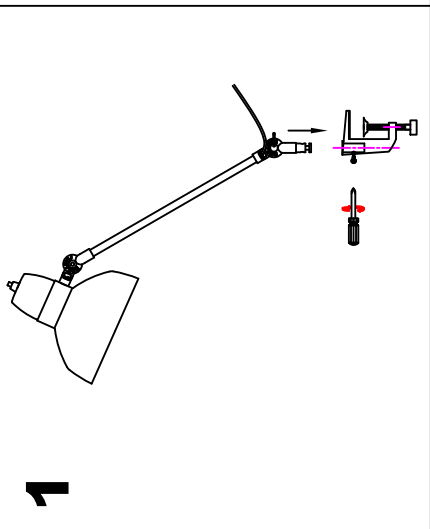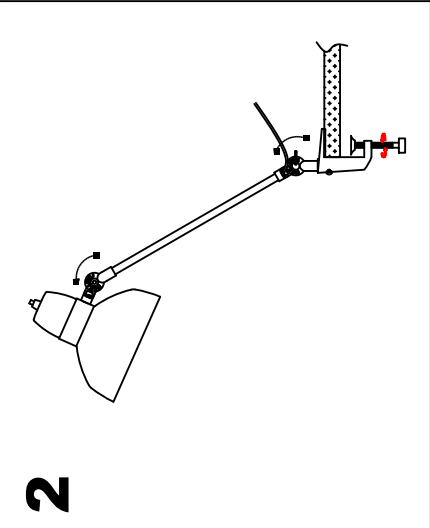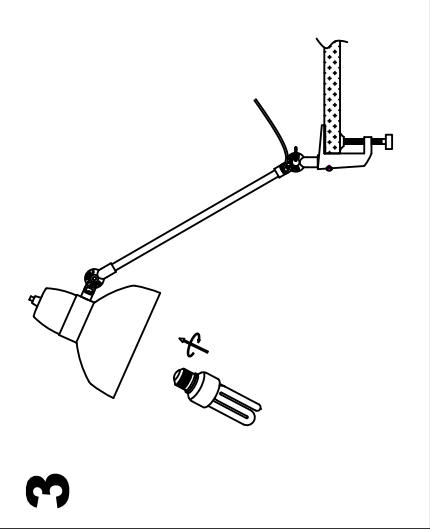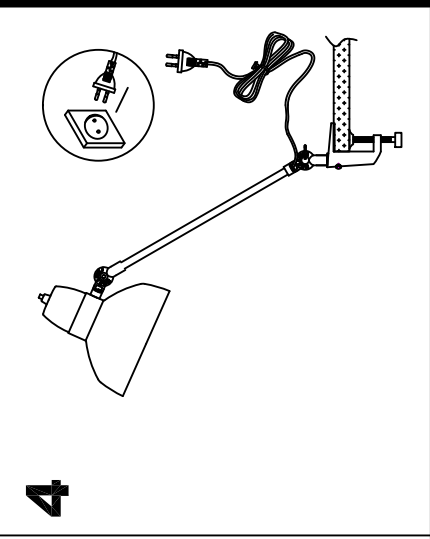RN 0.00 %



|   |   |  |   |
|---|---|--|---|
| <p><b>1</b></p>    | <p><b>2</b></p>    | <p><b>3</b></p>     | <p><b>4</b></p>    |
| <p><b>1</b></p>    | <p><b>2</b></p>   | <p><b>3</b></p>    | <p><b>4</b></p>   |
| <p><b>1</b></p>  | <p><b>2</b></p>  | <p><b>3</b></p>  | <p><b>4</b></p>  |